

Model: T 6.25**T/S Parameters**

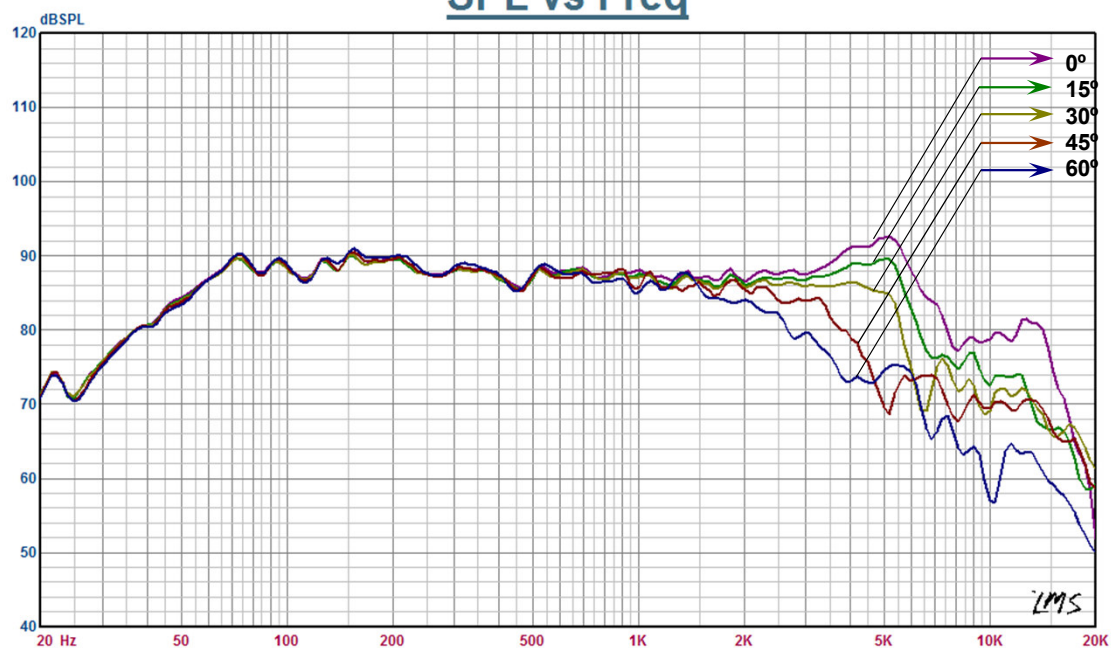
Normal Impedance	Znom	4 ohm
DC resistance	Re	3.6 ohm
Voice coil inductance	Le	0.61 mH @1kHz
Resonance frequency	Fs	53Hz
Mechanical Q factor	Qms	5.5
Electrical Q factor	Qes	0.63
Total Q factor	Qt	0.56
Moving mass(incl.air load)	Mms	14g
Suspension compliance	Cms	0.67 mm/N
Effective dome diameter	d	12.8 cm
Effective piston area	Sd	128.7 sq.cm
Equivalent volume	Vas	15L
Force factor	Bl	5.0Tm

Magnet and Voice Coil Properties

Magnet size		80mm*18mm
Voice coil diameter	Dc	25.5 mm
Winding height	Hc	16 mm
Linear excursion P-P	Xm	12mm
Max excursion P-P		25mm
Normal long term Power	Pnom	40 W
Instant(10ms) Max Power	Pmax	80 W

Other Properties

Sound Pressure Level/1m/1W	SPL	87.5 dB
Recommended range		50-6000 Hz
Net. weight		1.1 kg
Overall dimension		Φ 166*81 mm

Frequency response graph**SPL vs Freq****Impedance curve****Impedance vs Freq**